


## SHRINK WRAPPING MACHINE – MODEL IP-3015

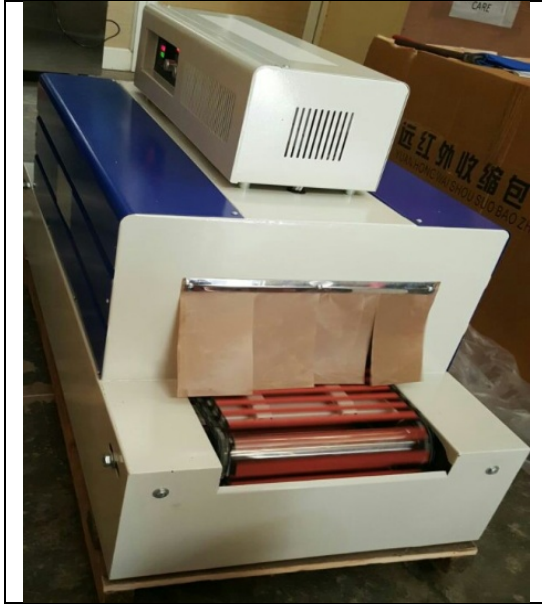

Compact design, high efficiency and portable model

Recommended for offices, banks, supermarkets for small size Bundles, Bottles, Packets, Containers, Print material etc.

Uses PVC, POF film.

Silicon sleeve rod conveyor mounted with 25W AC Motor operates on variable speed blower motor mounted on top.

PID Temperature controller with double display.

Technical Specification	
Tunnel Size(LxH) (mm)	300X150
Conveying Loading(kg)	10
Power Consumption(kw)	3.5
Power Supply	220V, 50Hz
Heating Zone(LxWxH) (mm)	800x300x150
Dimensions(LxWxH) (mm)	1200x540x660
Net Weight(kg)	35