

STRAPPING TOOLS & DISPENSERS

BATTERY POWERED STRAPPING TOOL



XUTIAN
CHINA

MODEL XT-200

- New generation battery powered hand strapping tool
- One-Piece strap inserting.
- One hand operation for tensioning and sealing.
- Strap tension and sealing time adjustable.
- Suitable for PP and PET strapping.

Specifications

| | |
|-----------------|----------------------------------|
| Strap Width | 13-16 mm adj |
| Strap Thickness | 0.5-1.0 mm |
| Tension | 40-200 kg |
| Type of Seal | Friction Weld |
| Battery Charge | upto 200 cycles with one battery |
| Dimensions | 375x130x140 (LxWxH) |
| Net Weight | 3.9 kg |



MODEL DD160T

NEW DESIGN

- High Tensioning
- High Capacity Li Ion battery

Specifications

| | |
|---------------------------------|-----------------------|
| Strap Width | 12-16 mm |
| Strap Thickness of PP | 0.6 - 1.0 mm |
| Strap Thickness of PET | 0.5-1.0 mm |
| Sealing way | Friction heat sealing |
| Tension Force | 600N - 4000N |
| Tension Speed | 13.5M/min |
| Operation Mode | Button |
| Battery Power | Li-Ion 14.4V/2.6AH |
| Charing Time | 60 Minutes |
| No. of cycles per battery up to | 350-450 |
| Charger Voltage | 100-240V / 50-60HZ |
| Long Life | 2000 Times |
| Weight (w/ battery) | 3.8 kg |
| Size | 360xW 135 x H 140 mm |



TRANSPAK
TAIWAN

MODEL H46

- Digital touch panel
- Wide tension force range
- Friction weld sealing
- Bosch battery and charger
- No adjustment required for different strap thickness
- Brushless motor technology
- Robust housing
- Perfect balance and ergonomic design
- Energy saving mode


Specifications

| Model No. | H-46A | H-46B |
|---------------------|--|---|
| Tension Range(Kg) | 40-250 | 60-400 |
| Strap Width (mm) | 15-16 | 19 |
| Strap Thickness(mm) | PP (0.55-1.05) PP (0.75-1.30) | PET (0.50-1.05) PET (0.60-1.30) |
| Net Weight (Kg) | 4.3 | 4.4 |
| Battery | Bostch Lilon 18V 4.0 Ah | Bostch Lilon 18V 4.0 Ah |
| Battery Charger | Bosch 115V(110V-120V) 230V(220V-240V) 50/60Hz 1PH | Bosch 115V(110V-20V) 230V(220V-240V) 50/60Hz 1PH |

PNEUMATIC STRAPPING TOOL

Specifications

| | |
|-----------------|---------------------|
| Strap Width | 13-19 mm adj |
| Strap Thickness | 1.0-1.5 mm |
| Tension | 200 kg |
| Type of Seal | Friction Weld |
| Pressure | 5-7 Bar |
| Dimensions | 275x115x130 (LxWxH) |
| Net Weight | 3.8 kg |

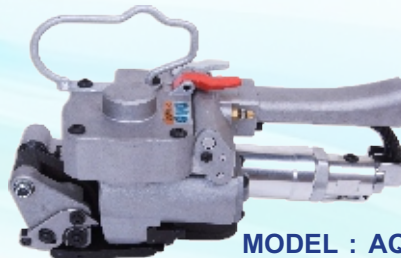

MODEL : AQD-19

- These pneumatic strapping tools are used to tension, seal and cut various grades of plastic straps of Polypropelene (P.P) and Polyester (PET).
- These tools create a SEALLESS joint and find wide usage in securing large articles, Pallets, Bales etc.

PLASTIC STRAPPING SEALER



- These Sealers are used with different sizes of PP and PET strap.
- PET Strap Sealers are for Crimping heavy duty serrated seals.
- High quality and duly heat treated for long life
- These tools are being sourced from top manufacturers of Taiwan and China

PLASTIC STRAPPING TENSIONER



- This tensioner is used for applying maximum tension with minimum effort
- Has cutter to cut off the excess strap
- Ergonomic and durable designs

PORTABLE STRAP DISPENSER

- Different models for steel and PET Strapping.
- Big rubber and wheels.
- Large tray for storing seals and tools.

Specifications

| Strap | Pet | Steel |
|---------------|------|---------|
| Strap Roll ID | 400 | 200/400 |
| Strap Roll OD | 650 | 610 mm |
| Strap Width | 25mm | 32mm |



SEALLESS STEEL STRAPPING TOOL

- Light weight die cast aluminium body
- No seal's required to lock strap
- Simple 3 step operation

Specifications

| | |
|---------------------|--------------|
| Joint Strength | upto 80% |
| Strap Width(mm) | 13-16-19 |
| Strap Thickness(mm) | 0.38 to 0.58 |
| Net Weight(kg) | 3.8 |



MODEL : A-333

ALLESPACK SYSTEMS PVT. LTD.